

TC-NCL514S

5MP Starlight IR bullet Camera



Tiandy



Features

- Up to 2592*1944@18fps
- S+265,H.265,H.264/M-JPEG Codec
- Min. Illumination Color: 0.002 Lux,B/W: 0.001Lux,0 Lux with IR
- Smart IR, IR Range: 50m
- Operating Conditions -35℃ ~ 60℃ (IR OFF) /-30℃ ~ 40℃ (IR ON), 0 ~ 95% RHG
- POE. IP67

Dimensions

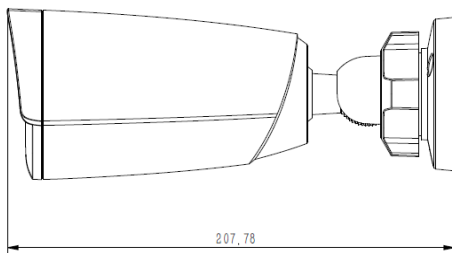

Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.002 Lux(F1.6,AGC ON) B/W: 0.001Lux(F1.6,AGC ON)
Shutter Time	1s to 1/100,000s
Lens	4mm
Lens Mount	M12
Day & Night	IR Cut Filter with Auto Switch
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR
Compression Standard	
Video Compression	S+265/H.265/H.264/M-JPEG
Video Bit Rate	32K~16Mbps
Audio Compression	N/A
Audio Bit Rate	N/A
Image	
Max. Image Resolution	2592*1944
Frame Rate	PAL: 2592*1944@18fps, 2560*1920@20fps, 2592*1520@25fps, 1440P@25fps, QXGA@25fps, 1080P@25fps, 960P@25fps, 720P@25fps, 640*360@25fps,4CIF@25fps, 2CIF@25fps, CIF@25fps NTSC: 2592*1944@18fps, 2560*1920@20fps, 2592*1520@25fps, 1440P@25fps, QXGA@30fps, 1080P@30fps, 960P@30fps, 720P@30fps, 640*360@30fps,4CIF@30fps, 2CIF@30fps, CIF@30fps
Mainstream	5MP (2592*1944)
Substream	4CIF (704*576)
3rd Stream	CIF (352*288)
Image Settings	Brightness, Saturation, Contrast,Flip Mode Adjustable by Client Software or Web Browser
HLC	Y
Smart Defog	Y
Corridor Format	Y
ROI	Y
Privacy Mask	Y
Picture Overlay	Y
OSD	16*16, 32*32, 24*24, 48*48, 64*64, 96*96 Size Letters Such as Week, Date, Time, Total 5 Regions
Network	
Network Storage	N/A
NTP	Y
ANR	N/A
Video Analytics	N/A
EW	N/A
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict/Mask Alarm
Protocols	TCP/UDP/HTTP/UPnP/DHCP/DDNS/FTP/NTP/RTSP /SMTP/SNMP
Remote Connection	≤7
System Compatibility	ONVIF (Profile S) ,P2P
Interface	
Audio Input	N/A
Audio Output	N/A
Communication Interface	1-ch RJ45 10M / 100M Ethernet Interface
Alarm Input	N/A
Alarm Output	N/A
Video Output	N/A
On-board Storage	N/A
Extension	N/A
General	
Language	English,Simplified Chinese,Traditional Chinese,Spanish, Italian, Korean, Turkish, Russian, Thai, polish, French
Operating Conditions	-35℃~60℃, 0~95% RHG
Power Supply	DC 12 V ± 25%, POE
Power Consumption	Max. 3W(IR OFF) (ICR Instant Switch 5.5W)
IR Light	2
IR Distance	50m
White Light	N/A
Impact Protection	IP67
Dimensions	208mm (length) ×82mm (width) ×81mm (height)
Weight	0.5KG

* The latest product information / specification can be found at <http://en.tiandy.com/>



Tiandy Technologies Co., Ltd | en.tiandy.com

Add: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China

Tel: +86-22-58596037 Email: sales@tiandy.com

